


MOTOREDUCTEURS ECONOMIQUES PHMR

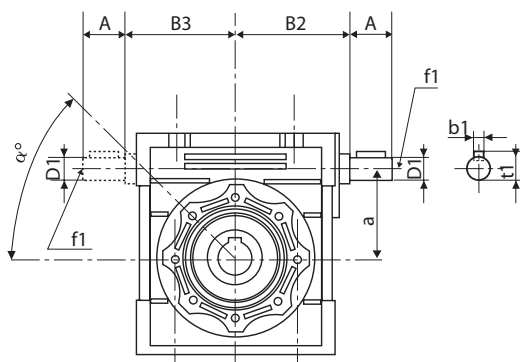


Désignation PHMR x taille x ratio x moteur x bride

PHMR	30	40	50	63	75	90	110	130	150
A	20	23	30	40	50	50	60	80	80
D1 j6	9	11	14	19	24	24	28	30	35
B2	51	60	74	90	105	125	142	162	195
B3	45	53	64	75	90	108	135	155	175
a	30	40	50	63	75	90	110	130	150
b1	3	4	5	6	8	8	8	8	10
f1	-	-	M6	M6	M8	M8	M10	M10	M12
t1	10,2	12,5	16	21,5	27	27	31	33	38

GUIDE DE LUBRIFICATION

LUBRIFICATION	PHMR 025/090	PHMR 110/130	CHPC
Lubrifiant	Synthétique	Minérale	Synthétique
°C ambiant	-25°C/+50°C	-25°C/+50°C	-25°C/+50°C
ISO	VG320	VG320	VG320
AGIP	TELUMVSF 320	BLASIA 320	TELUM VSF 320
SHELL	TIVELA OIL S 320	OMALA OIL 320	TIVA OIL SC 320
IP	TELUM VSF	MELLANA OIL 320	TELUM VSF

POSITION BORNIER

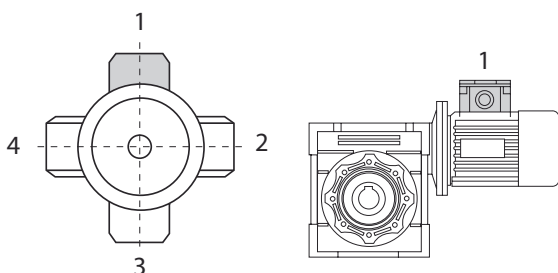

Quantité d'huile en litres selon la position du motoréducteur

I	B3	B6	B7	B8	V5	V6	Type Huile (ISO)
25	0,02	0,02	0,02	0,02	0,02	0,02	VG320 synthétique (Shell Tivela oil S 320)
30	0,04	0,04	0,04	0,04	0,04	0,04	
40	0,08	0,08	0,08	0,08	0,08	0,08	
50	0,15	0,15	0,15	0,15	0,15	0,15	
63	0,30	0,30	0,30	0,30	0,30	0,30	
75	0,55	0,55	0,55	0,55	0,55	0,55	
90	1,00	1,00	1,00	1,00	1,00	1,00	
110	3,00	2,50	2,50	2,20	3,00	2,50	Minérale VG320
130	4,50	3,50	3,50	3,50	4,50	3,30	

PHMR

PRUD'HOMME transmissions

25 chemin d'Aubervilliers - F-93203 SAINT-DENIS CEDEX
Tél. 01 48 11 46 00 - Fax 01 48 34 49 49
www.prudhomme-trans.com
info@prudhomme-trans.com

Modèle	Ratio			7,5 10 15 20 25					30 40 50 60 80 100							
	C	I	E	D H7												
25	56B14	50	65	80	9											
30	63B5	95	115	140	11											
	63B14	60	75	90	11											
	56B5	80	100	120	9											
	56B14	50	65	80	9											
40	71B5	110	130	160	14											
	71B14	70	85	105	14											
	63B5	95	115	140	11											
	63B14	60	75	90	11											
50	56B5	80	100	120								9				
	80B5	130	165	200	19											
	80B14	80	100	120	19											
	71B5	110	130	160	14											
63	71B14	70	85	105	14											
	63B5	95	115	140							11					
	90B5	130	165	200	24											
	90B14	95	115	140	24											
75	80B5	130	165	200	19											
	80B14	80	100	120	19											
	71B5	110	130	160							14					
	71B14	70	85	105							14					
90	100/112B5	180	215	250	28											
	100/112B14	110	130	160	28											
	90B5	130	165	200	24											
	90B14	95	115	140	24											
110	80B5	130	165	200					19							
	80B14	80	100	120					19							
	71B5	110	130	160							14					
	100/112B5	180	215	250	28											
130	100/112B14	110	130	160	28											
	90B5	130	165	200							24					
	132B5	230	265	300	38											
	100/112B5	180	215	250	28											
24	100/112B14	110	130	160	28											
	90B5	130	165	200												
	132B5	230	265	300	38											