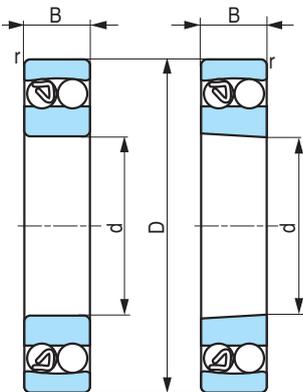
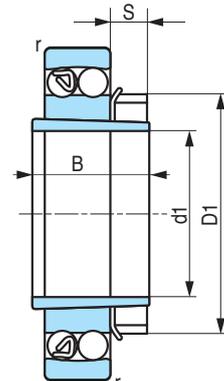
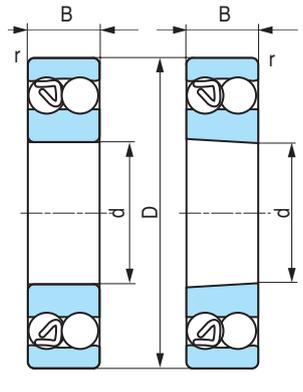
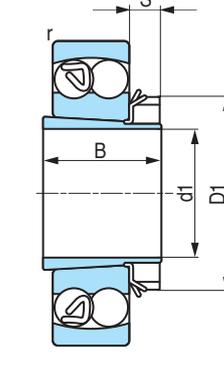


ROULEMENTS À BILLES


À ROTULE ET 2 RANGÉES DE BILLES

SÉRIE 1200	Réf	Dimensions mm				MANCHONS H2...	Réf	Dimensions mm				
		d	D	B	r min.			d ₁	D ₁	B	r min.	S
 <p>1212... 12...K (K) : Alésage conique</p>	1200	10	30	9	0,6	 <p>12...K + H2</p>	- Vu dans le tableau officiel LD					
	01	12	32	10	0,6		-	-	-	-	-	
	02	15	35	11	0,6		-	-	-	-	-	
	03	17	40	12	0,6		-	-	-	-	-	
	1204	20	47	14	1		-	-	-	-	-	
	05(K)	25	52	15	1		H205	20	38	26	8	8
	06(K)	30	62	16	1		06	25	45	27	8	8
	07(K)	35	72	17	1,1		07	30	52	29	9	9
	1208(K)	40	80	18	1,1		H208	35	58	31	10	10
	09(K)	45	85	19	1,1		09	40	65	33	11	11
	10(K)	50	90	20	1,1		10	45	70	35	12	12
	11(K)	55	100	21	1,5		11	50	75	37	12	12
	1212(K)	60	110	22	1,5		H212	55	80	38	13	13
	13(K)	65	120	23	1,5		13	60	85	40	14	14
	14(K)	70	125	24	1,5		-	-	-	-	-	-
	15(K)	75	130	25	1,5		15	65	98	43	15	15
	1216(K)	80	140	26	2		H216	70	105	46	17	17
	17(K)	85	150	28	2		17	75	110	50	18	18
	18(K)	90	160	30	2		18	80	120	52	18	18
	19(K)	92	170	32	2,1		19	85	125	55	19	19
	1220(K)	100	180	34	2,1		H220	90	130	58	20	20
	22(K)	11	200	38	2,1		22	100	145	63	21	21

SÉRIE 1300	Réf	Dimensions en mm				MANCHONS H3...	Réf	Dimensions en mm				
		d	D	B	r min.			d ₁	D ₁	B	r min.	S
 <p>13... 13...K (K) : Alésage conique</p>	1300	10	35	11	0,6	 <p>13K... + H3 (K) : Alésage conique</p>	* : Cotes en pouces pour l'alésage d ₁ des manchons H2 et H3 : Nous consulter					
	01	12	37	12	1		H305	20	38	29	8	8
	02	15	42	13	1		06	25	45	31	8	8
	03	17	47	14	1		077	30	52	35	9	9
	1304	20	52	15	1,1		H308	35	58	36	10	10
	05 (K)	25	62	17	1,1		09	40	65	39	11	11
	06 (K)	30	72	19	1,1		10	45	70	42	12	12
	07 (K)	35	80	21	1,5		11	50	75	45	12	12
	1308 (K)	40	90	23	1,5		H312	55	80	47	13	13
	09 (K)	45	100	25	1,5		13	60	85	50	14	14
	10 (K)	50	110	27	2		-	-	-	-	-	-
	11 (K)	55	120	29	2		15	65	98	55	15	15
	1312 (K)	60	130	31	2,1		H316	70	105	59	17	17
	13 (K)	65	140	33	2,1		17	75	110	63	18	18
	14-	70	150	35	2,1		18	80	120	65	18	18
	15 (K)	75	160	37	2,1		19	85	125	67	19	19
	1316 (K)	80	170	39	2,1		H320	90	130	71	20	20
	17 (K)	85	180	41	3		22	100	145	77	21	21
	18 (K)	90	190	43	3		-	-	-	-	-	-
	19	92	200	45	3		-	-	-	-	-	-
	1320 (K)	100	215	47	3		-	-	-	-	-	-
	22 (K)	110	240	50	3		-	-	-	-	-	-

PRUD'HOMME
transmissions

25 chemin d'Aubervilliers - F-93203 SAINT-DENIS Cedex
Tél. 01 48 11 46 00 - Fax 01 48 34 49 49
www.prudhomme-trans.com
info@prudhomme-trans.com

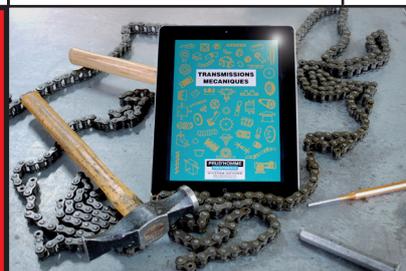

LE catalogue
de référence
de la transmission
mécanique
en France
sur iPad® !