



COURROIES TRAPÉZOÏDALES

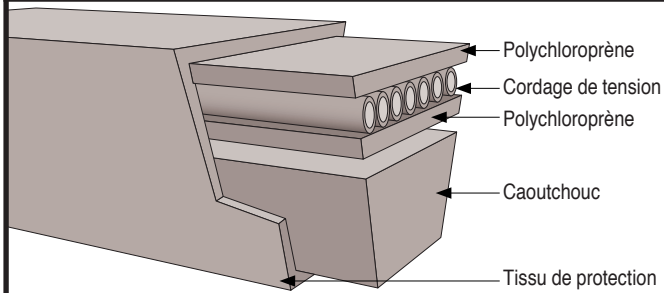

Désignation SP... Taille (Li) E

	SPZ E	SPA E	SPB E	SPC E	3V E	5V E	8V E
Masse linéaire courroie (kg/m)	0,08	0,13	0,22	0,35	0,08	0,22	0,50
Ø min. poulie (mm)	63	90	140	224	67	180	330
Vitesse max. courroie (m/s)	40	40	40	40	40	40	40


SPZ E



en Stock


Les dimensions tramées

SPA E



Li										Li									
512	737	900	1047	1212	1387	1587	1812	2087	2580	647	925	1120	1282	1500	1707	1932	2282	2650	3032
562	750	912	1060	1222	1400	1600	1837	2120	2650	707	932	1132	1307	1507	1732	1957	2300	2682	3082
587	762	922	1077	1237	1412	1612	1850	2137	2690	732	950	1150	1320	1525	1750	1982	2307	2720	3150
600	772	925	1087	1250	1437	1637	1862	2160	2720	757	957	1157	1332	1532	1757	2000	2332	2725	3182
607	787	937	1112	1262	1450	1650	1887	2187	2800	782	975	1180	1357	1557	1782	2032	2360	2732	3282
612	800	950	1120	1270	1462	1662	1900	2240	2840	800	982	1207	1367	1582	1800	2057	2382	2782	3340
630	812	962	1137	1280	1487	1687	1937	2262	3000	807	1000	1215	1382	1600	1807	2082	2432	2800	3350
637	825	975	1147	1287	1500	1700	1962	2287	3150	832	1007	1220	1400	1607	1832	2120	2482	2832	3382
662	837	987	1150	1312	1512	1737	1987	2360	3170	850	1032	1232	1407	1632	1857	2132	2500	2847	3550
670	850	1000	1162	1320	1520	1750	2000	2410	3350	857	1060	1250	1425	1650	1882	2182	2532	2882	3760
687	862	1012	1180	1337	1537	1762	2019	2437	3550	882	1082	1257	1432	1657	1900	2207	2580	2932	4000
710	875	1024	1187	1347	1550	1782	2037	2487		900	1090	1272	1450	1682	1907	2232	2607	2982	4250
722	887	1037	1202	1362	1562	1800	2062	2500		907	1107	1280	1457	1700	1925	2240	2632	3000	4500


SPB E



en Stock


Les dimensions tramées

SPC E




Li										Li						
1250	1475	1757	2000	2246	2430	2800	3650	4750	6300	2000	2650	3550	4750	6000	8000	10600
1320	1500	1800	2020	2264	2500	3000	3750	5000	6700	2120	2800	3750	5000	6300	8500	11200
1340	1600	1850	2110	2360	2580	3150	4000	5300	7100	2240	3000	4000	5300	6700	9000	11800
1400	1700	1860	2120	2380	2650	3250	4250	5600	7500	2360	3150	4250	5600	7100	9500	12000
1450	1750	1900	2240	2391	2680	3350	4500	6000	8000	2500	3350	4500	5830	7500	10000	12500


3V E



5V E



8V E

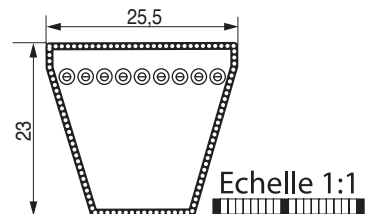

Désignation xV code RMA E Ex.: 5V100E

Code RMA				Code RMA										Code RMA					
475	630	850	1120	500	560	610	680	750	840	900	1030	1180	1000	1320	1800	2360	3150	4250	
500	670	900	1180	510	570	630	690	790	850	930	1060	1230	1060	1400	1900	2500	3350	4500	
530	710	950	1250	530	580	650	710	800	860	950	1080	1250	1120	1500	2000	2650	3550	4745	
560	750	1000	1320	540	590	660	730	810	870	960	1120	1320	1180	1600	2120	2800	3760		
600	800	1060	1400	550	600	670	740	830	880	1000	1150	1400	1250	1700	2240	3000	4000		