

POULIES À "MOYEU CONIQUE AMOVIBLE" POUR COURROIES DENTÉES CLASSIQUES

Pas 9,5 mm	L	Largeur courroie		L050							L075							L100							
		Largeur poulie	Diamètres	19							25							32							
Dents	Dp	De	Df	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	
18	54,59	53,81	60	1108	28	af	45		22	3	1108	28	af			25	0	1108	28	bf		38	22	9	
19	57,61	56,84	64	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
20	60,63	59,88	66,50	"	"	"	48	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
21	63,68	62,91	73	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
22	66,7	65,94	75	"	"	"	51	"	"	"	"	"	"	"	"	"	"	"	"	"	"	48	"	"	"
23	69,73	68,97	79	"	"	"	54	"	"	"	"	"	"	"	"	"	"	"	"	"	"	52	"	10	"
24	72,77	72	79	"	"	"	54	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
25	75,8	75,04	86	"	"	"	56	"	"	"	"	"	"	"	"	"	"	"	"	"	"	54	"	"	"
26	78,84	78,07	86	"	"	"	60	"	"	"	"	"	"	"	"	"	"	"	"	"	"	60	"	"	"
27	81,86	81,1	91	"	"	"	62	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
28	84,89	84,13	91	"	"	"	65	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
30	90,96	90,2	97	"	"	"	70	"	"	"	"	"	"	"	"	"	"	1210	32	"	"	71	25	7	"
32	97,03	96,26	102	"	"	"	74	"	"	"	"	"	"	"	"	"	"	"	"	"	"	75	"	"	"
36	109,14	108,39	120	"	"	"	85	"	"	"	1610	42	"	"	"	"	"	1610	42	"	"	86	"	"	"
40	121,29	120,51	128	1610	42	"	97		25	6	"	"	"	"	"	"	"	"	"	"	"	96	"	"	"
48	145,54	144,77	150	"	"	sf	88	120	"	6	"	"	nf	90	120	"	"	"	"	nf	92	120	"	"	"
60	181,92	181,15		"	"	s	92	166	"	3	"	"	n	92	106	"	"	"	"	n	"	166	"	3,5	"
72	218,29	217,53		"	"	r	92	202	"	3	"	"	r	"	202	"	"	2012	50	r	106	202	32	0	"
84	254,69	253,92		"	"	"	92	236	"	3	2012	50	"	106	236	32	3,5	"	"	"	"	236	"	0	"
96	291,06	290,3		2012	50	"	106	270	32	6,5	"	"	"	"	270	"	"	"	"	"	"	270	"	0	"
120	363,83	363,07		"	"	"	"	343	"	6,5	"	"	"	"	343	"	"	"	"	"	"	343	"	0	"

Autres types : Voir page 101 >

Pas 12,7m	H	Largeur courroie		H100							H150							H200							
		Largeur poulie	Diamètres	32							45							58							
Dents	Dp	De	Df	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B	
18	72,77	71,39	79	1210	32	bf	52	25	6		1210	32	bf	52	25	20									
19	76,81	75,44	82,50	"	"	"	56	"	"	"	"	"	"	56	"	"	"	"	"	"	"	"	"	"	"
20	80,85	79,48	86	"	"	"	60	"	"	"	"	"	"	60	"	"	"	"	"	"	"	"	"	"	"
21	84,89	83,52	91	"	"	"	64	"	7	"	"	"	"	64	"	"	1610	42	bf	"	64	25	33	"	
22	88,94	87,56	94	"	"	"	67	"	"	"	"	"	"	67	"	"	"	"	"	"	"	67	"	"	"
23	92,98	91,61	102	"	"	"	70	"	"	"	1610	42	"	70	"	"	"	"	"	"	"	70	"	"	"
24	97,03	95,65	102	1610	42	"	73	"	"	"	"	"	"	74	"	"	"	"	"	"	"	74	"	"	"
25	101,06	99,69	112	"	"	"	77	"	"	"	"	"	"	77	"	"	"	"	"	"	"	77	"	"	"
26	105,11	103,73	112	"	"	"	82	"	"	"	"	"	"	82	"	"	"	"	"	"	"	82	"	"	"
27	109,15	107,78	120	"	"	"	85	"	"	"	"	"	"	85	"	"	"	"	"	"	"	85	"	"	"
28	113,18	111,82	120	"	"	"	90	"	"	"	"	"	"	90	"	"	"	"	"	"	"	90	"	"	"
30	121,29	119,9	128	"	"	"	98	"	"	"	"	"	"	98	"	"	"	"	"	"	"	98	"	"	"
32	129,3	127,99	135	"	"	nf	80	106	"	"	"	"	nf	80	106	"	"	2012	50	"	"	106	32	26	"
36	145,54	144,16	158	"	"	"	92	121	"	"	"	"	"	92	121	"	"	"	"	nf	102	121	"	"	"
40	161,7	160,33	168	"	"	"	"	138	"	"	"	"	"	"	138	"	"	"	"	"	100	140	"	"	"
48	194,03	192,67	200	2012	50	"	106	169	32	0	2012	50	"	106	169	32	13	2517	60	"	119	168	45	13	
60	242,55	241,18		"	"	m	"	223	"	1	"	"	m	"	223	"	7,5	"	"	m	"	223	"	7,5	"
72	291,06	289,69		"	"	"	"	270	"	"	"	"	"	270	"	"	"	"	"	"	"	270	"	"	"
84	339,57	338,2		"	"	"	"	318	"	"	"	"	"	318	"	"	"	"	"	"	"	318	"	"	"
96	388,09	386,71		2517	60	r	119	366	45	5,5	2517	60	"	119	366	45	0,5	"	"	"	"	366	"	"	
120	485,12	483,73		"	"	"	"	462	"	"	"	"	"	462	"	"	"	"	"	"	"	462	"	"	"


AUTRES SECTIONS : Nous consulter

Pas 12,7m	H	Largeur courroie		H300						
		Largeur poulie	Diamètres	84						
Dents	Dp	De	Df	N° Moyeu	Alés. Max	TYPE	DM	Di	L	A B
18	72,77	71,39	79							
19	76,81	75,44	82,5							
20	80,85	79,48	86							
21	84,89	83,52	91	1615	42	ef	65	38	23	
22	88,94	87,56	94	"	"	"	67	"	"	
23	92,98	91,61	102	"	"	"	70	"	"	
24	97,03	95,65	102	"	"	"	73	"	"	
25	101,06	99,69	112	"	"	"	77	"	"	
26	105,11	103,73	112	"	"	"	82	"	"	
27	109,15	107,78	120	2012	50	"	85	32	26	
28	113,18	111,82	120	"	"	"	90	"	"	
30	121,29	119,9	128	"	"	"	98	"	"	
32	129,3	127,99	135	2517	60	"	106	45	19,5	
36	145,54	144,16	158	"	"	"	121	"	"	
40	161,7	160,33	168	"	"	"	138	"	"	
48	194,03	192,67	200	"	"	nf	119	165	20,5	
60	242,55	241,18		"	"	m	"	223	"	
72	291,06	289,69		"	"	"	"	270	"	
84	339,57	338,2		"	"	"	"	320	"	
96	388,09	386,71		3030	75	"	150	362	76	5
120	485,12	483,73		"	"	"	"	460	"	"

Désignation Ex.: P 30 L 075 MA



P - Dents - Type courroie - Larg. - MA

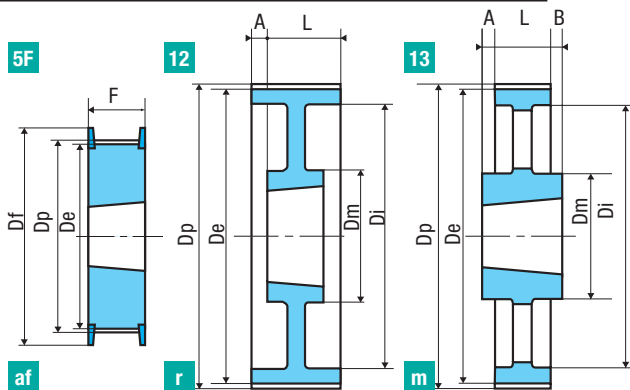

MOYEURS AMOVIBLES : Voir page 541