


BUTÉES À AIGUILLES


SÉRIE AXK

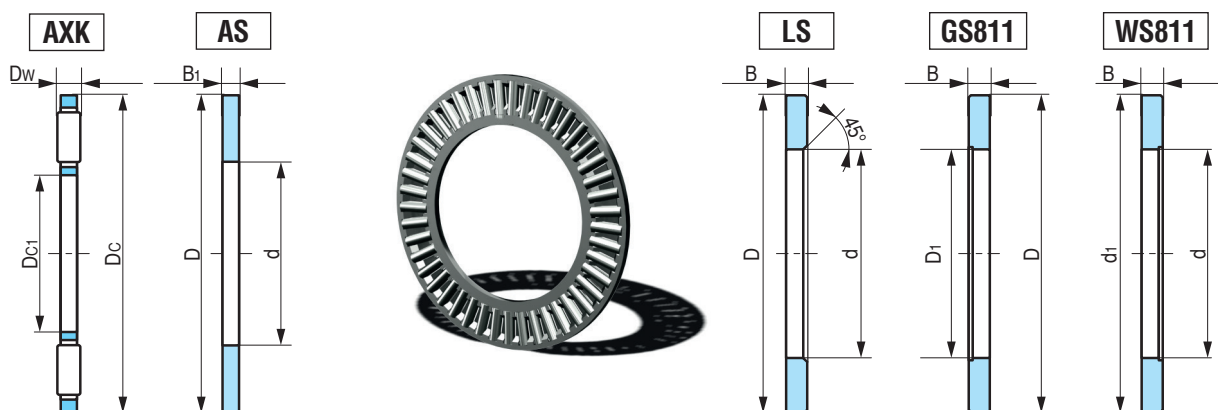

Désignation AXK/AS/LS/GS811/WS811 Dc1D DCD Ex.: AXK1226

Réf.	Poids g	Axe roulement	Poids g	Roulement	Boîtier roulement	Axe rondelle	Poids g	Dimensions (mm)					Charge (N)		Vitesse limite Tr/min.			
								Dc1D	D1	DC D	d1	Dw	B1	B		Dynamique	Statique	
AXK0414TN	0,7	AS0414	1	-	-	-		4		14	2	1	-	4380	7500	18000		
AXK0515TN	0,8	AS0515	1	-	-	-		5		15	2	1	-	4680	9100	17000		
AXK0619TN	1	AS0619	2	LS0619	-	-		6		19	2	1	2,75	6740	15400	16000		
AXK0821TN	2	AS0821	2	LS0821	-	-		8		21	2	1	2,75	7750	19000	15000		
AXK1024	3	AS1024	3	LS1024	-	WS81102		10		24	2	1	2,75	9150	24500	14000		
AXK1226	3	AS1226	3	LS1226	-	WS81103		12		26	2	1	2,75	9860	28600	13000		
AXK1528	4	AS1528	3	LS1528	GS81102	WS81104		15	16	28	2	1	2,75	11200	35500	11000		
AXK1730	4	AS1730	4	LS1730	GS81103	WS81105		17	18	30	2	1	2,75	118000	38600	10000		
AXK2035	5	AS2035	5	LS2035	GS81104	WS81106	13	20	21	35	35	2	1	2,75	12900	45600	8500	
AXK2542	7	AS2542	7	LS2542	GS81105	WS81107	19	25	26	42	42	2	1	3	13800	57800	7000	
AXK3047	8	AS3047	8	LS3047	GS81106	WS81108	22	30	32	47	47	2	1	3	15600	69500	6000	
AXK3552	10	AS3552	9	LS3552	GS81107	WS81109	29	35	37	52	52	2	1	3,5	16900	80100	5500	
AXK4060	16	AS4060	12	LS4060	GS81108	WS81110	40	40	42	60	60	3	1	3,5	27500	113500	4700	
AXK4565	18	AS4565	13	LS4565	GS81109	WS81111	50	45	47	65	65	3	1	4	29050	127600	4300	
AXK5070	20	AS5070	14	LS5070	GS81110	WS81112	55	50	52	70	70	3	1	4	31500	13800	3900	
AXK5578	28	AS5578	18	LS5578	GS81111	WS81113	88	55	57	78	78	3	1	5	37400	185000	3500	
AXK6085	33	AS6085	22	LS6085	GS81112	WS81114	97	60	62	85	85	3	1	4,75	43900	232500	3200	
AXK6590	35	AS6590	24	LS6590	GS81113	WS81115	115	65	67	90	90	3	1	5,25	45800	254600	3000	
AXK7095	60	AS7095	25	LS7095	GS81114	WS81116	123	70	72	95	95	4	1	5,25	53600	254400	29000	
AXK75100	61	AS75100	27	LS75100	GS81115	WS81117	142	75	77			100	4	1	5,75	54500	264600	2700
AXK80105	63	AS80105	28	LS80105	GS81116	WS81118	151	80	82			105	4	1	5,75	55600	278500	2600
AXK85110	67	AS85110	29	LS85110	GS81117	WS81120	159	85	87			110	4	1	5,75	57500	28800	2400
AXK90120	86	AS90120	39	LS90120	GS81118	WS81122	234	90	92			120	4	1	6,5	72500	401000	2300
AXK100135	104	AS100135	50	LS100135	GS81120	WS81124	350	100	102			135	4	1	7	90500	559500	2000
AXK110145	122	AS110145	55	LS110145	GS81122	WS81126	385	110	112			145	4	1	7	96500	617500	1900
AXK120155	131	AS120155	59	LS120155	GS81124	WS81128	415	120	122			155	4	1	7	101500	679600	1700
AXK130170	205	AS130170	65	LS130170	GS81126	WS81130	663	130	132			170	5	1	9	132400	838900	1600
AXK140180	219	AS140180	79	LS140180	GS81128	WS81132	749	140	142			178	5	1	9,5	137200	899600	1500
AXK150190	232	AS150190	84	LS150190	GS81130	-	796	150	152			188	5	1	9,5	142800	959000	1400
AXK160200	246	AS160200	89	LS160200	GS81132	-	842	160	162			198	5	1	9,5	147600	1015000	1300

SÉRIE NTA

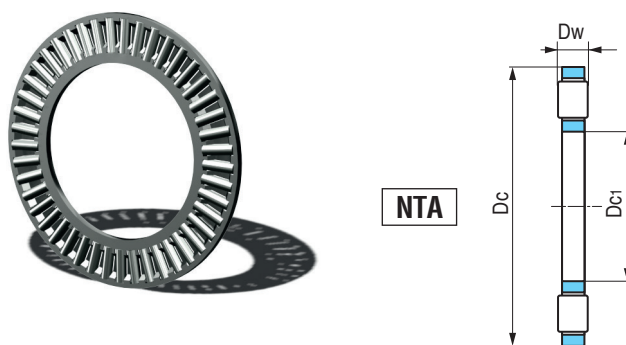

Réf.	Poids g	dimensions (mm)			ø Axe mm	Charge (N)		Vitesse limite lubrification par huile Tr/min.
		Dc1	Dc	Dw		Dynamique	Statique	
NTA512	2	7,92	19,5	1,984	7,92	4600	4100	7000
NTA1423	5	22,22	36,5	1,984	22,22	10400	40800	5000
NTA3244	8	50,8	69,85	1,984	50,8	19500	115130	5600